

WinCOMM V.92_LX

Internal 56Kbps Fax Data modem with Caller ID

Quick Start Guide

Version 1.0

FEATURES/SPECIFICATIONS

- V.90, V.92, ITU-T, V.34, V.32 bis, V.32, V.22 bis V.22 and Bell 212A, ITU-T, V.23, V.21 and Bell 103
- Transmission speed – receiving rate up to 56Kbps (downstream), and transmit rate up to 33.6 Kbps.
- Data Compression – ITU-T V.44, V.42 bis and MNP5
- Fax specs – ITU-T V.17, V.29, V.27 ter, V.21 channel 2
EIA/TIA 578 FAX Class 1, or T.31 Fax Class 1.0 commands
- PCI 2.2-compliant
- Full Duplex
- Tone and Pulse dialing
- Auto detect Voice/Data/Fax modes

SYSTEM REQUIREMENTS:

- x86 compatible PC with a PCI bus expansion slot
- CD-ROM drive, Quad speed or faster
- Hard Drive with at least 100MB free space
- Microsoft Windows® XP, Windows® Vista
- Sound card required for Voice and Answering functions


CHECK LIST:

- Internal PCI Modem
- RJ11 Phone Cord
- Software & Document CD-ROM
- Quick Start Guide (Printed)

Hardware Installation:

1. Make sure the power to your PC is turned OFF.
2. Remove the computer's cover.
3. Select a PCI bus expansion slot for the new adapter. Remove the slot cover
4. Insert the modem into place carefully. Secure the adapter and retaining bracket.
5. Replace the computer's cover.

HARDWARE DESCRIPTION:

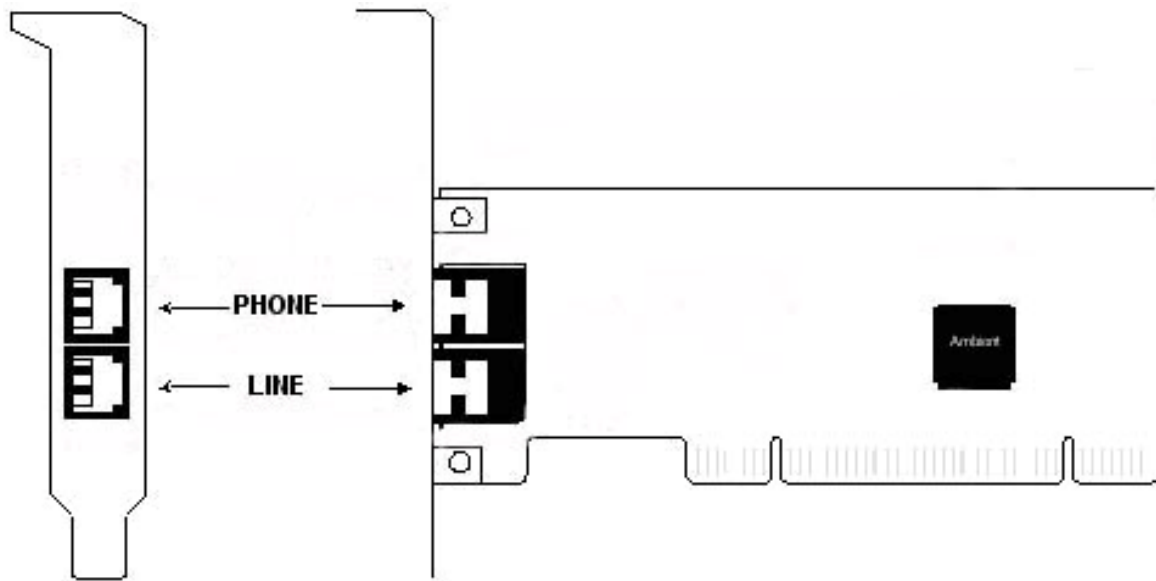


Software Installation:

This guide is intended to help you get started quickly with driver installation in Microsoft Windows.

Important Notice: Add second modem or change the modem to an existing PC system, you may proceed a few steps before install the new hardware and software (modem's driver). The followings are some of the considers:

1. To change a new modem, please remove the existing modem driver, or disable it from Windows® system before you remove the existing hardware.
2. To added second modem, make sure the mainboard that has available IRQ for new devices, and there is no conflict between the others.
3. The driver installation for upgrade system as same as below, if error occur when you proceed step 1, or 2, please consult with your system dealer or the existing hardware manufacturer support.



Windows® XP/ Vista Installation

Windows® XP is the latest version out from Microsoft and that has built-in PnP function to detects any new hardware (included this modem) on the system but make sure your motherboard utility driver is installed correctly.

After your XP's desktop loads-up completely, the new hardware wizard will be prompt for your modem. If your windows system has trouble to detect it, or your desktop problem to starts-up after modem added physically, please re-start your windows system again, and make sure the motherboard utility has been setup properly.

Insert the manufacturer's software CD into your CD-ROM and follow the steps to install the modem driver.

1. For WinXP, once you have completed the hardware installation, power on your computer. The Found New Hardware Wizard will show a prompt to search for driver for new hardware found. Click Cancel.
2. After inserting the CD, click on Modem Driver.
3. Select your system Operating System.
4. For Vista system, need to click Allow.
5. Click OK to continue with driver installation

FaxTalk Communication SE

Note: FaxTalk may detect that your modem as supporting speakerphone, and display speakerphone options within the program. The modem chipset in the Modem may support

speakerphone, however, it does not have a microphone or speakerphone socket to operate in speakerphone mode.

Installation –

- 1) Insert CD, Click on Software FaxTalk SE to install software or can use explore CD and go into FaxTalk SE folder , D:\FaxTalk SE, double click on Setup to install.
- 2) Choose setup language then click ok.
- 3) At the install shield wizard click next
- 4) Accept License agreement, click next
- 5) Type in user name and organization, click next
- 6) Destination folder, can change or just use the default and click next
- 7) Click Install to install the program
- 8) On the Modem Settings window, select Agere Systems PCI soft modem, click next
- 9) After detection, click next to continue, at the Answer setting window can select your desire setting and click next
- 10) At the Fax settings window can enter fax information for user and click next
- 11) Click Finish to finish installation

To enable caller id -

Open FaxTalk Communicator and select configure> program> modem> Advanced >Distinctive Ring/Caller ID setting

Check the box, “Use FaxTalk for Distinctive Ring/ Caller ID service

Check the box, “Enable Caller ID detection on incoming calls”

Make sure the Caller ID initialization string is set to +vcid=1

Modem Dialing Location

If you want to change your dialing location, please follow the instruction as below:

Can open FaxTalk Communicator

Click on Configure> Dialing Properties, can edit your location

Or

For Windows XP --- Click Control Panel -> Phone And Modem Options -> Under Dialing Rules click Edit, and then you can change your location.

FOR Windows VISTA --- Click Control Panel -> Phone And Modem Options -> Under Dialing Rules click Edit, and then you can change your location.

For More information on FaxTalk please check your CD FaxTalk User Guide.

Limited Warranty.

Manufacturer warrants that the products sold hereunder are free from defects in material and workmanship for a period of two (2) years from manufacturing date. This limited warranty applies only to the original purchaser of Jatón Product and is not transferable. This limited warranty does not apply if failure to the Product Registration, or over thirty (30) days from purchase (original invoice date). This Limited Warranty does not cover any incompatibilities due to the user's computer, hardware, software or any related system configuration in which the Jatón Products interfaces. Proof of purchase will be requiring before any consideration by Manufacturer occurs.

Other Limits.

The forgoing is in lieu of all other warranties, expressed or implied. Including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Manufacturer does not warrant against damages or defects arising out of improper or abnormal use of handling of the products; against defects or damages arising from improper installation (where installation is by persons other than Manufacturer),

against defects in products or components not manufactured or installed by Manufacturer, or against damages result from non-manufacturer made products or components. This warranty does not apply if the Product has been damaged by accident, abuse, nor misuse. This warranty also does not apply to products upon which repairs have been affected or attempted by persons other than pursuant to written authorization by Manufacturer.

Exclusive Obligation.

This warranty is exclusive. The sole and exclusive obligation of Manufacturer shall repair or replace the defective products in the manner and for the period provided above. Manufacturer shall not have any other obligation with respect to the Products or any part thereof, whether based on contract, tort, and strict liability or otherwise. Under no circumstances, whether based on this Limited Warranty or otherwise, Manufacturer shall not be liable for incidental, special, or consequential damage.

Other Statements.

Manufacturer's employees or representatives' **ORAL OR OTHER WRITTEN STATEMENTS DO NOT CONSTITUTE WARRANTIES**, shall not be relied upon by Buyer, and are not a part of the contract for sale or this Limited Warranty.

Terms and Conditions.

Direct Jatón Customer:

This warranty applies only for a period of two (2) years from

purchase date of Jatón original invoice.

Reseller/ Vendor:

This warranty applies only for a period of two (2) years from manufacturing date.

Registered User:

This warranty applies only for a period of two (2) years from purchase date AND customer must register within 30 days of purchase date from legal reseller.

Others:

If the products do not conform to this Limited Warranty (as herein above described), Manufacturer should charge services such as repair, replacement whether based on its costs. Shipping and installation of the replacement Products or replacement parts shall be at User's expense.

Services agreement:

- (1) All applicants shall complete service request form from Manufacturer.

- (2) All returned checks will be charged a \$20.00 fee by Manufacturer.
- (3) All repair and replacement services allow 4-6 weeks from the date of receiving by Manufacturer.
- (4) All products without warranties require service processing fee \$20 (payment in advance), which is not refundable.

Entire Obligation.

This Limited Warranty states the entire obligation of Manufacturer with respect to the Products. If any part of this Limited Warranty is determined to be void or illegal, the remainder shall remain in force and effect. Some states do not allow limitation of implied warranties, or exclusive or limitation on product incidental or consequential damages, so above limitation may not apply to you. This warranty gives you specific legal rights. You may have other rights that may vary from state to state.

This warranty applies only to this product, and is governed by the law of the State of California.

Reducing Warranty Claim Rejections.

To reduce the potential of incurring damages not covered by Manufacturers warranties, we strongly recommend the following:

- read your manuals before installing peripherals and/or before making changes to the machine's configuration;
- ask your dealer if there are any known problems with the system requirements or installation procedures for any add-on products that you are purchasing;
- buy industry standard products where compatibility issues are more likely to surface;
- If you are unsure about installation for a new product, contact your dealer's service department.

We believe it is important for you to know and understand what your warranty coverage provides and what it does not.

We also want you to be aware that most hardware warranties only relate to the function of the hardware. In most cases, no assurances are given by the manufacturer that the hardware item will work in conjunction with any other hardware item. If a computer product is not working because it is not compatible with another product, or because it has not been properly installed and set-up, the manufacturer does not pay for the service time. To help avoid these inconveniences, contact a professional consultant that one can help you determine the possibility of incompatibility issue before you purchase add-on or accessories.

Warranty Service Use Only


Serial Number - ten or eleven digit code, the serial number consists of the following parts:

| | | |
|----------------|------------------------|---------------------------|
| Packaging Type | Manufactured Date Code | Production Numerical Code |
| A | 00 8 | 000015 |

↓ ↓
Year Month

XXXXX-XXX-XX

S/N: A008000015



xxxx/xxxx 00.0 XXXX XX XXXXXX

Product Label and Manufactured Date Code

FCC Shielded Cable Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. Operation is subject to the following conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation,
“SHIELD INTERFERENCE CABLE (S) MUST BE USED ACCORDING TO FCC 15.27©.”

CAUTION:

Changes or modifications not expressly approved by the Manufacturer could void your authority to operate this equipment in accordance with FCC rules and regulations.

TRADEMARK AND COPYRIGHT:

All Trademarks and Registered Trademarks belong to respective owners.
©2009 Jatón Corporation. All rights reserved.